



### 1.ELECTRICAL RATINGS

10(3)A 125/250VAC 25T125  
1/4HP 250VAC (UL61058);

10(3)A 125/250VAC 25T125 1E5  
(IEC61058).

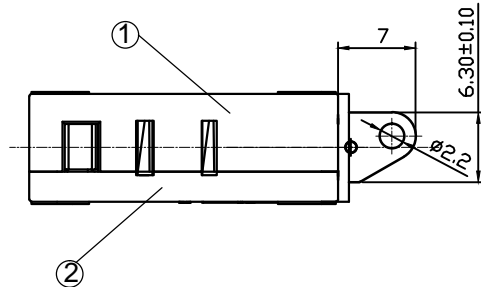

### 2.CHARACTERISTICS

Operating Force	160±40 gf
Release Force	15 gf min
Pretravel	2.7 mm max.
Overtravel	0.9mm min
Movement Differential	0.4mm max.
Operating Posttion	14.7±0.5mm

ITEM	DESCRIPTION	MATERIAL
01	COVER	PBT
02	BASE	PBT
03	BUTTON	PBT
04	TERMINAL	SILVER PLATE COPPER ALLOY
05	TERMINAL	SILVER PLATE COPPER ALLOY
06	CONTACT	Ag ALLOY/Cu
07	SPRING	SILVER PLATE COPPER ALLOY
08	MOVE PLATE	SILVER PLATE COPPER ALLOY
09	MOVE SHAFT	SILVER PLATE COPPER ALLOY