



(Tolerance:  $\pm 0.1$ )  
(P.C.B thickness  $t=1.6$ )

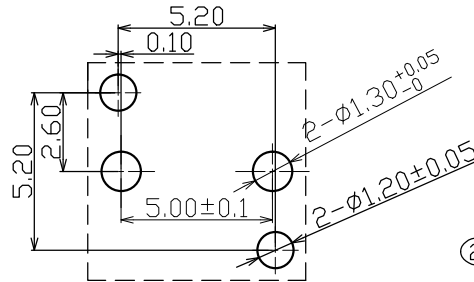

ITEM	PART NAME	MATERIAL	COLOR
1	BUTTON	POM	BLACK
2	SILICA GEL	SILICA GEL	
3	COVER	PBT	BLACK
4	SPRING	SUS	
5	BASE 1	PA66	BLACK
6	BASE 2	PA66	BLACK
7	TERMINAL	SILVER PLATE BRASS	

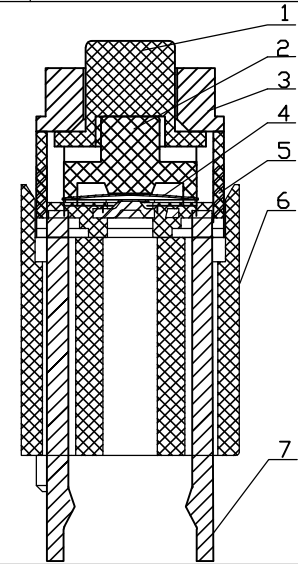

Rating	6VDC 50mA
Contact Resistance	500mΩ Max
Insulation Resistance	50MΩ Min
Dielectric Voltage	250VAC 60±5S
Endurance	3,000,000 cycles
Operating Force	70±15gf (每10gf一段)
Pre-travel	0.30±0.20mm
CCP	35%-55% (OF-RF)/OF*100%

②0  
②1  
②2