


P. C. B mounting hole detail

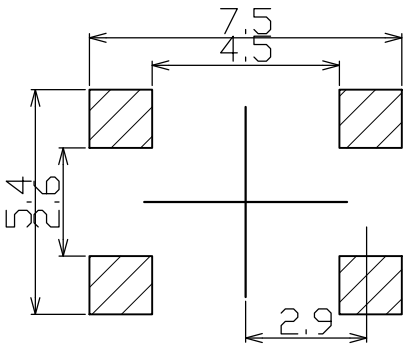

1. Material list

ITEM	DESCRIPTION	MATERIAL
1	Cover	SUS
2	Dome	SUS301
3	Knob	Silica gel
4	Base	Nylon
5	Terminal	Copper alloy

Rating	1mA 5VDC
Contact Resistance	500mΩ Max
Insulation Resistance	>100MΩ DC100V
Withstand Voltage	AC250V 1min.
Manual welding Temper.	350±5°C 2~3s
Electrical Life	3,000,000 cycles
Mechanical Life	3,000,000 cycles
Ambient Temper. Used	-25°C to +85°C
Ambient Humidity Used	≤85% at +40°C
Operating Force	60±10gf
Release Force	15gf Min.

CIRCUIT

